



**RELIEF WELL #2**  
Development Driller II

**DISCOVERER ENTERPRISE DRILL SHIP**  
Original MC 252 #1 Subsea Containment

**RELIEF WELL #1**  
Development Driller III  
Spudded May 2nd at 15:27 hrs

## RELIEF WELLS & SUBSEA CONTAINMENT

### OVERVIEW


BP intends to drill two wells designed to intersect the original wellbore above the oil reservoir. This will allow heavy fluid to be pumped into the well which will stop the flow of oil from the reservoir. Cement will then be pumped down to permanently seal the well.

### CURRENT PROGRESS

- ▶ DDII - MC 252 #2
- ▶ Spudded well - May 16th
- ▶ Set 36" casing at 5,471'
- ▶ Set 28" casing at 6,614'
- ▶ Set 22" casing at 8,576'

### CURRENT PROGRESS

- ▶ DDIII - MC 252 #3
- ▶ Spudded well - May 2nd
- ▶ Set 36" casing at 5,494'
- ▶ Set 28" casing at 6,730'
- ▶ Set 22" casing at 8,762'
- ▶ Set 18" casing at 9,945'
- ▶ Drilled casing to 12,090'

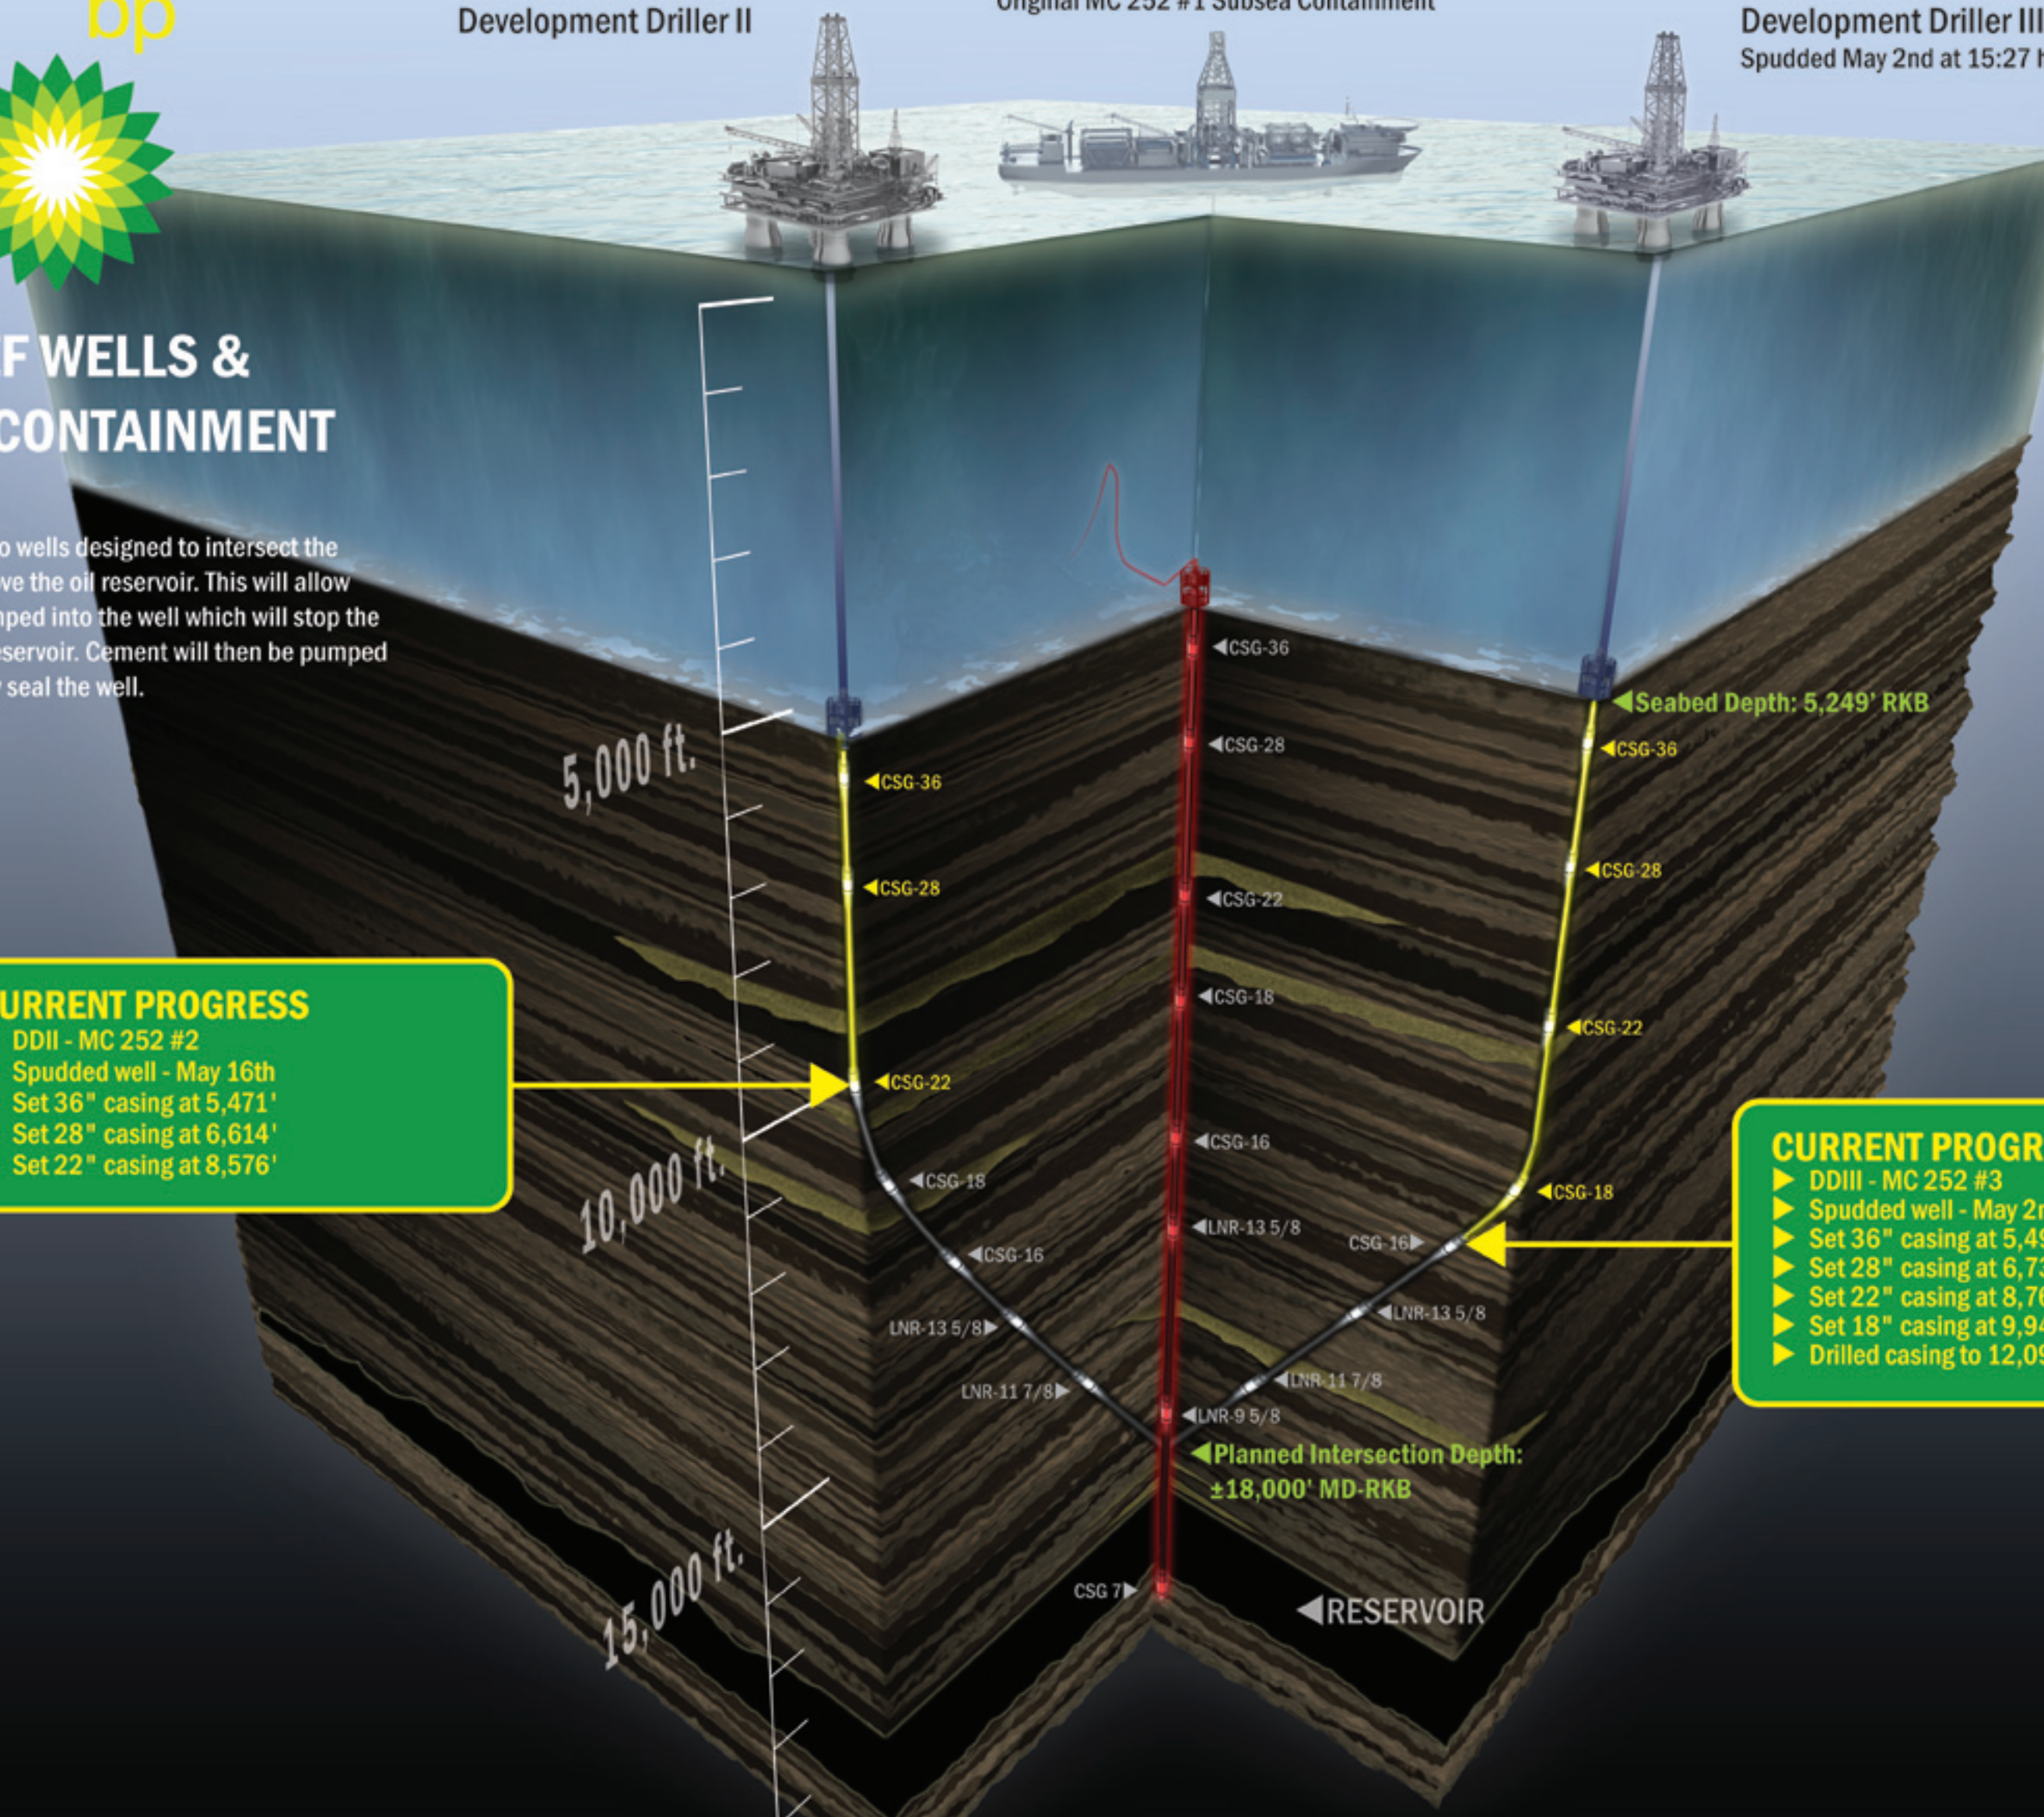

Planned Intersection Depth:  
±18,000' MD-RKB

RESERVOIR